

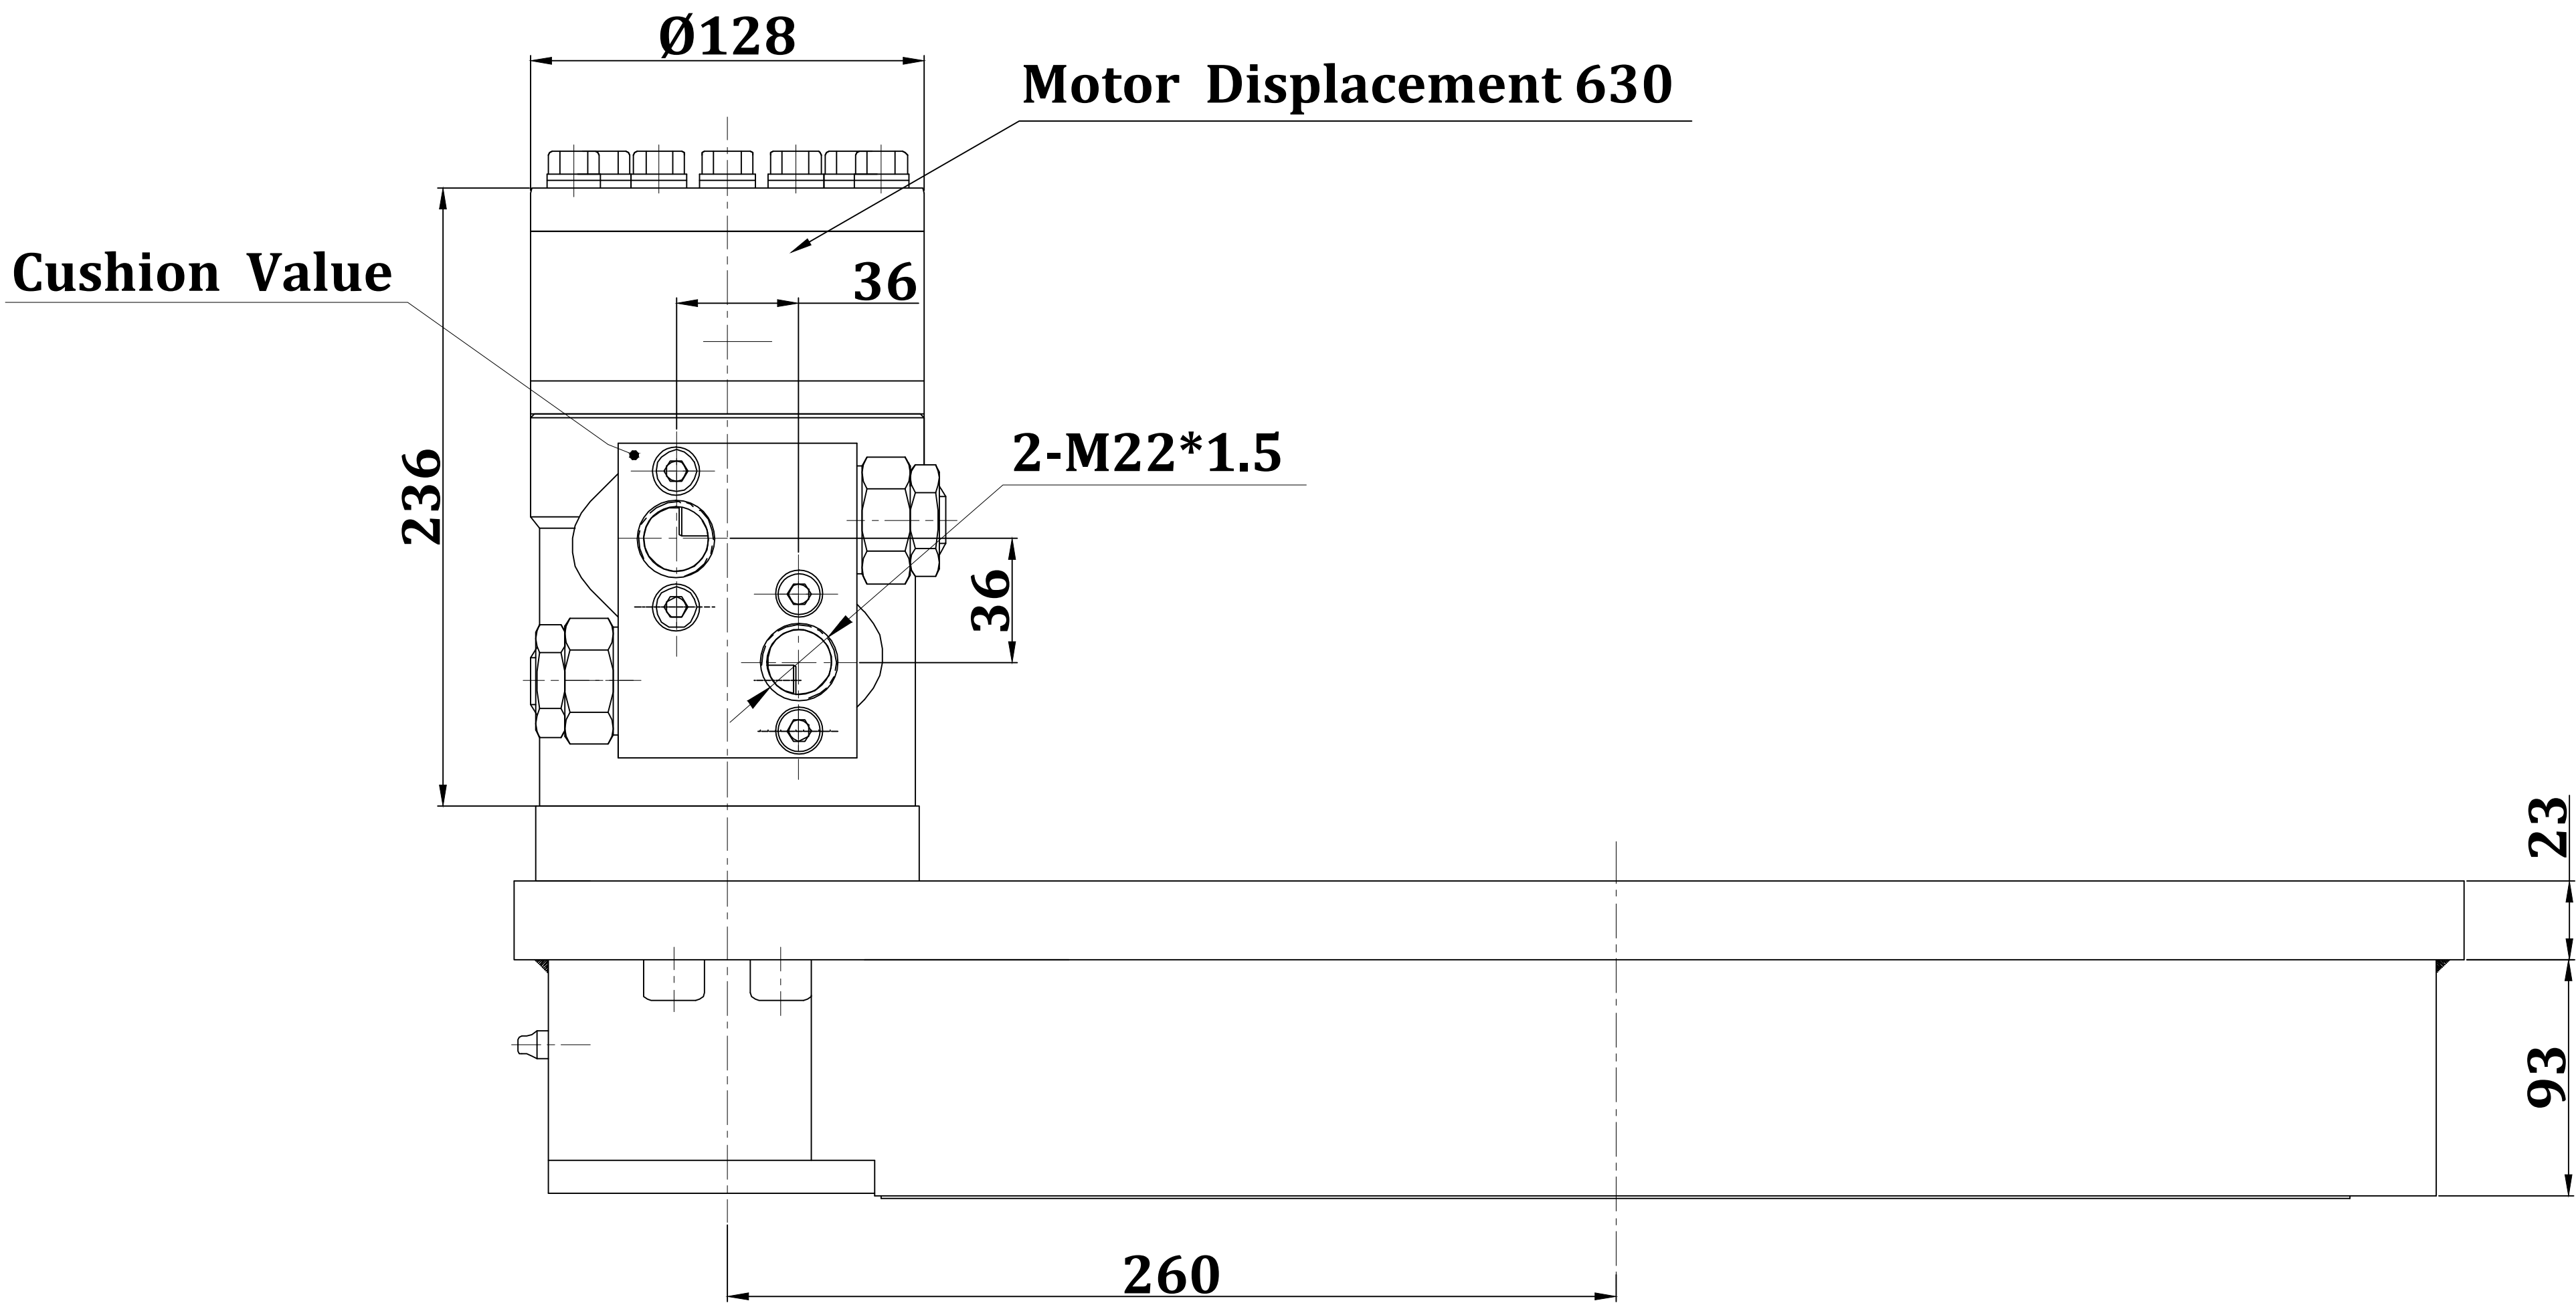


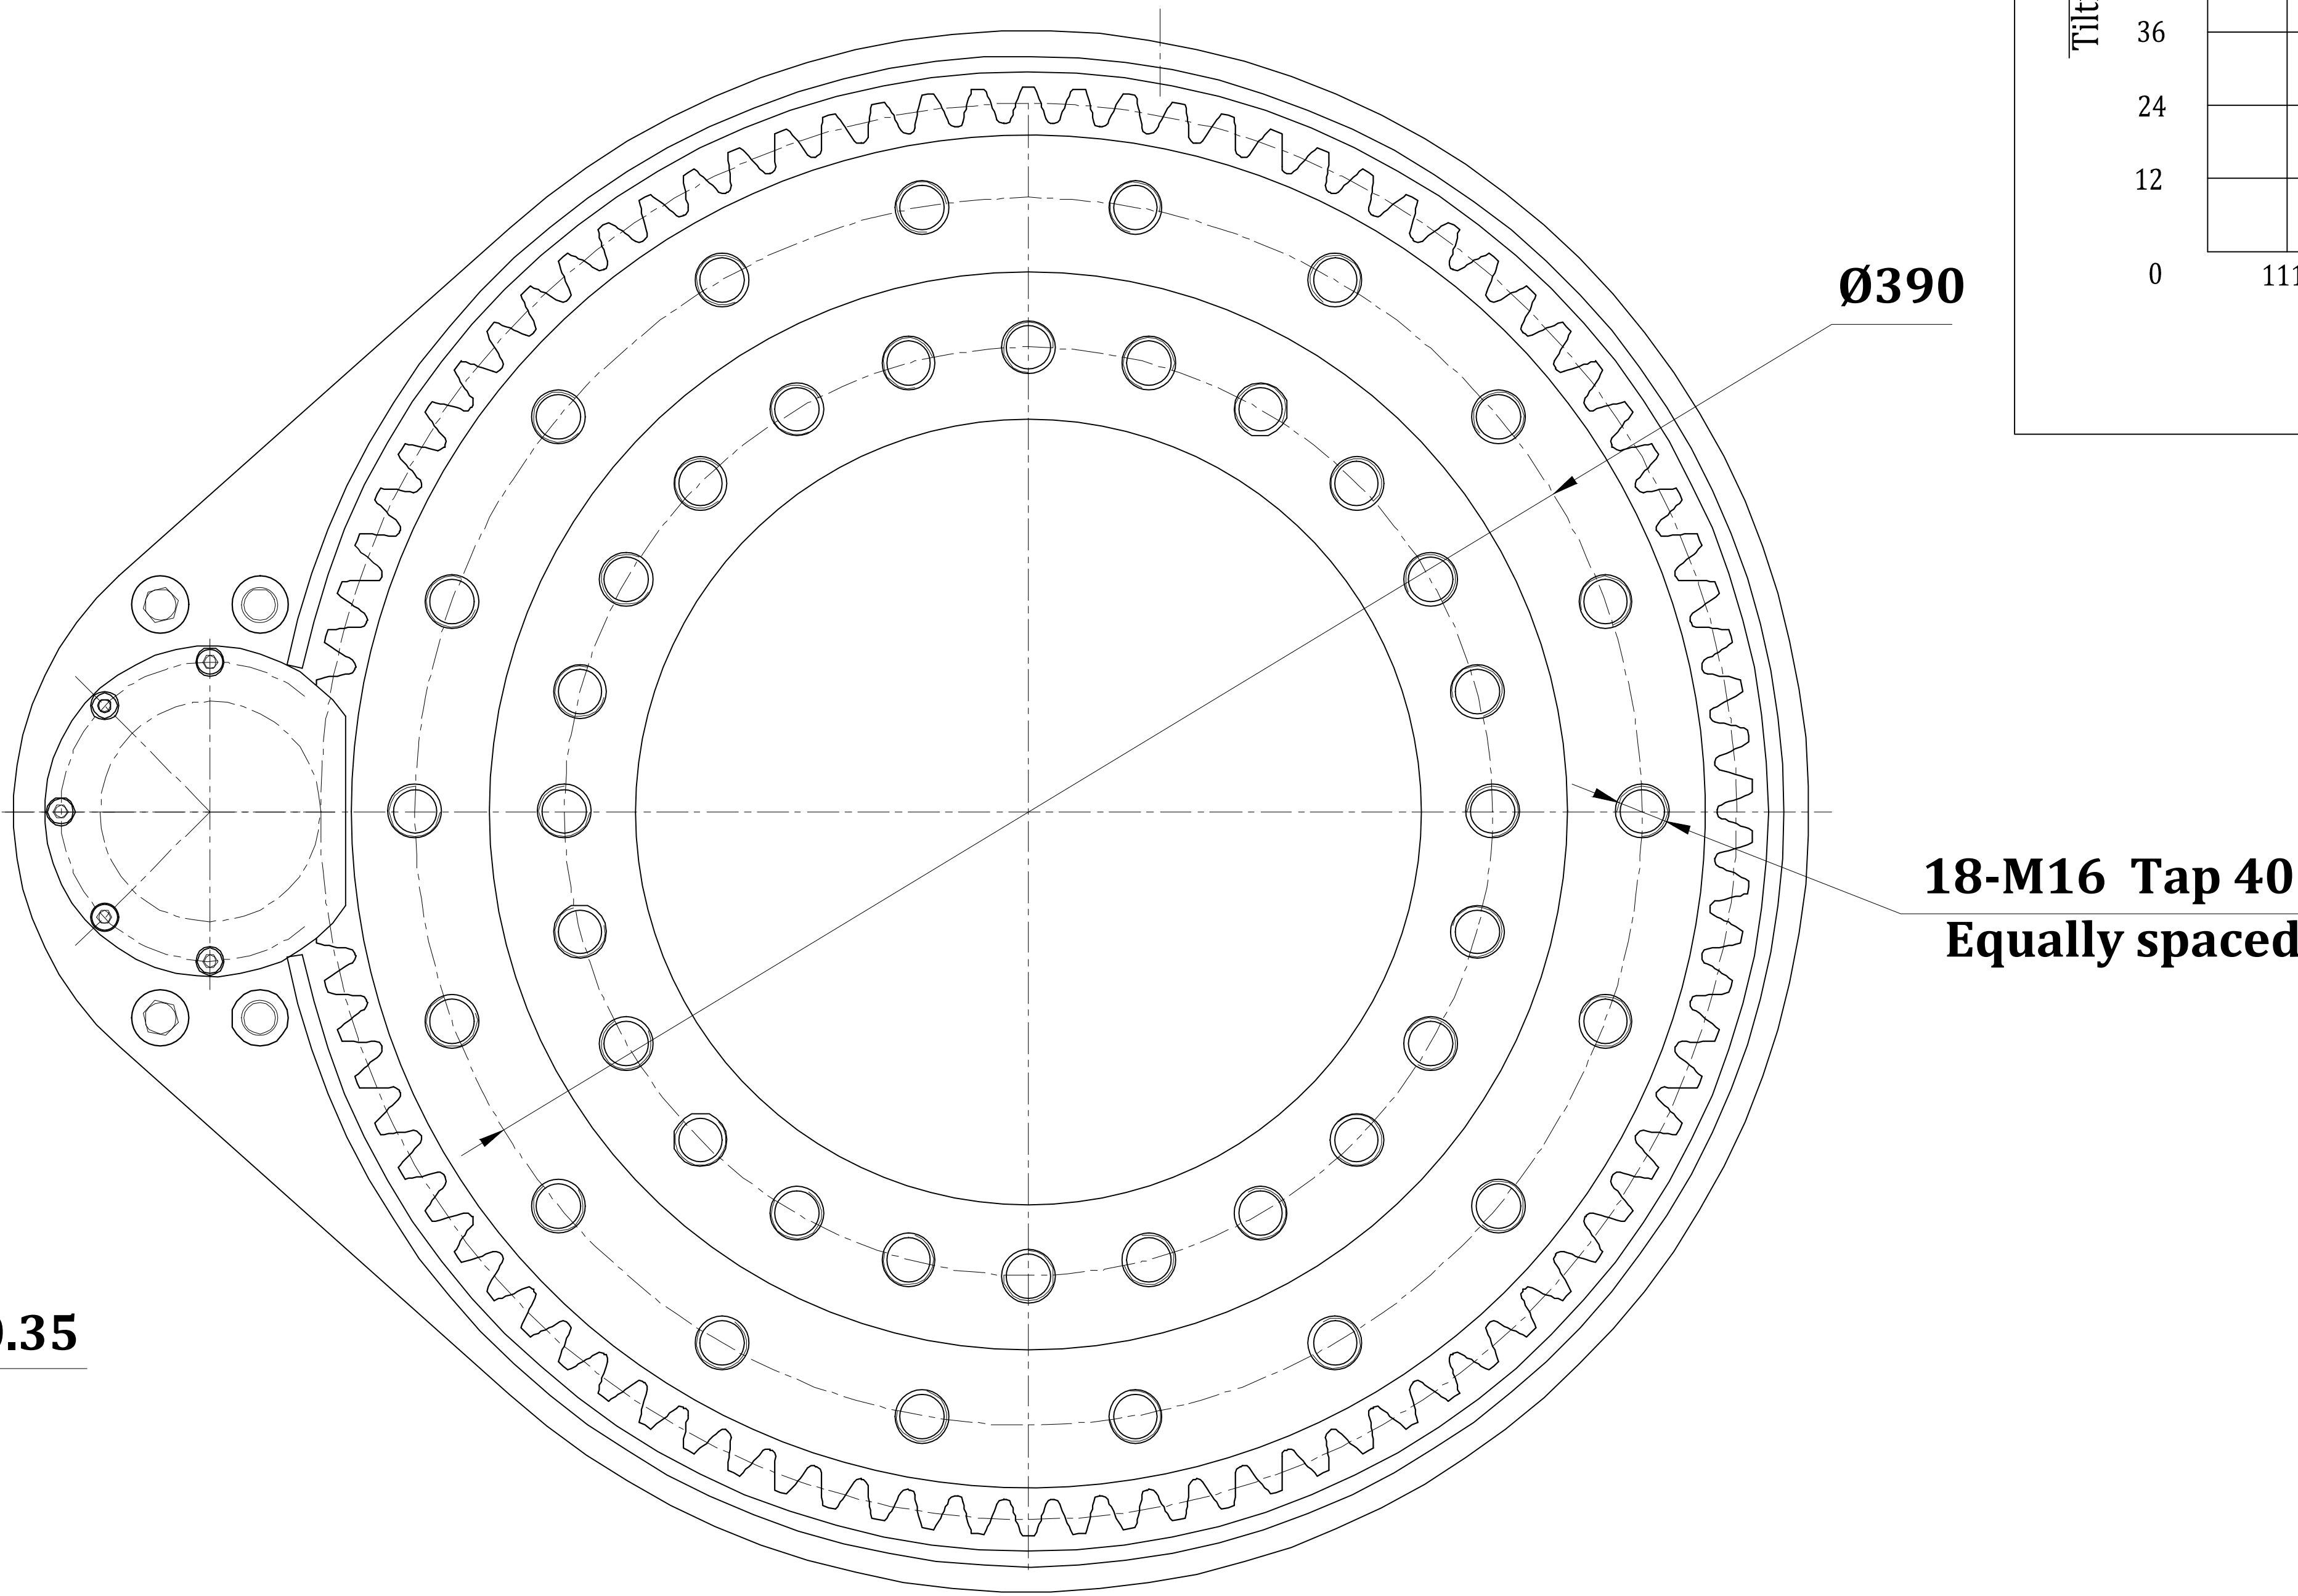




H View

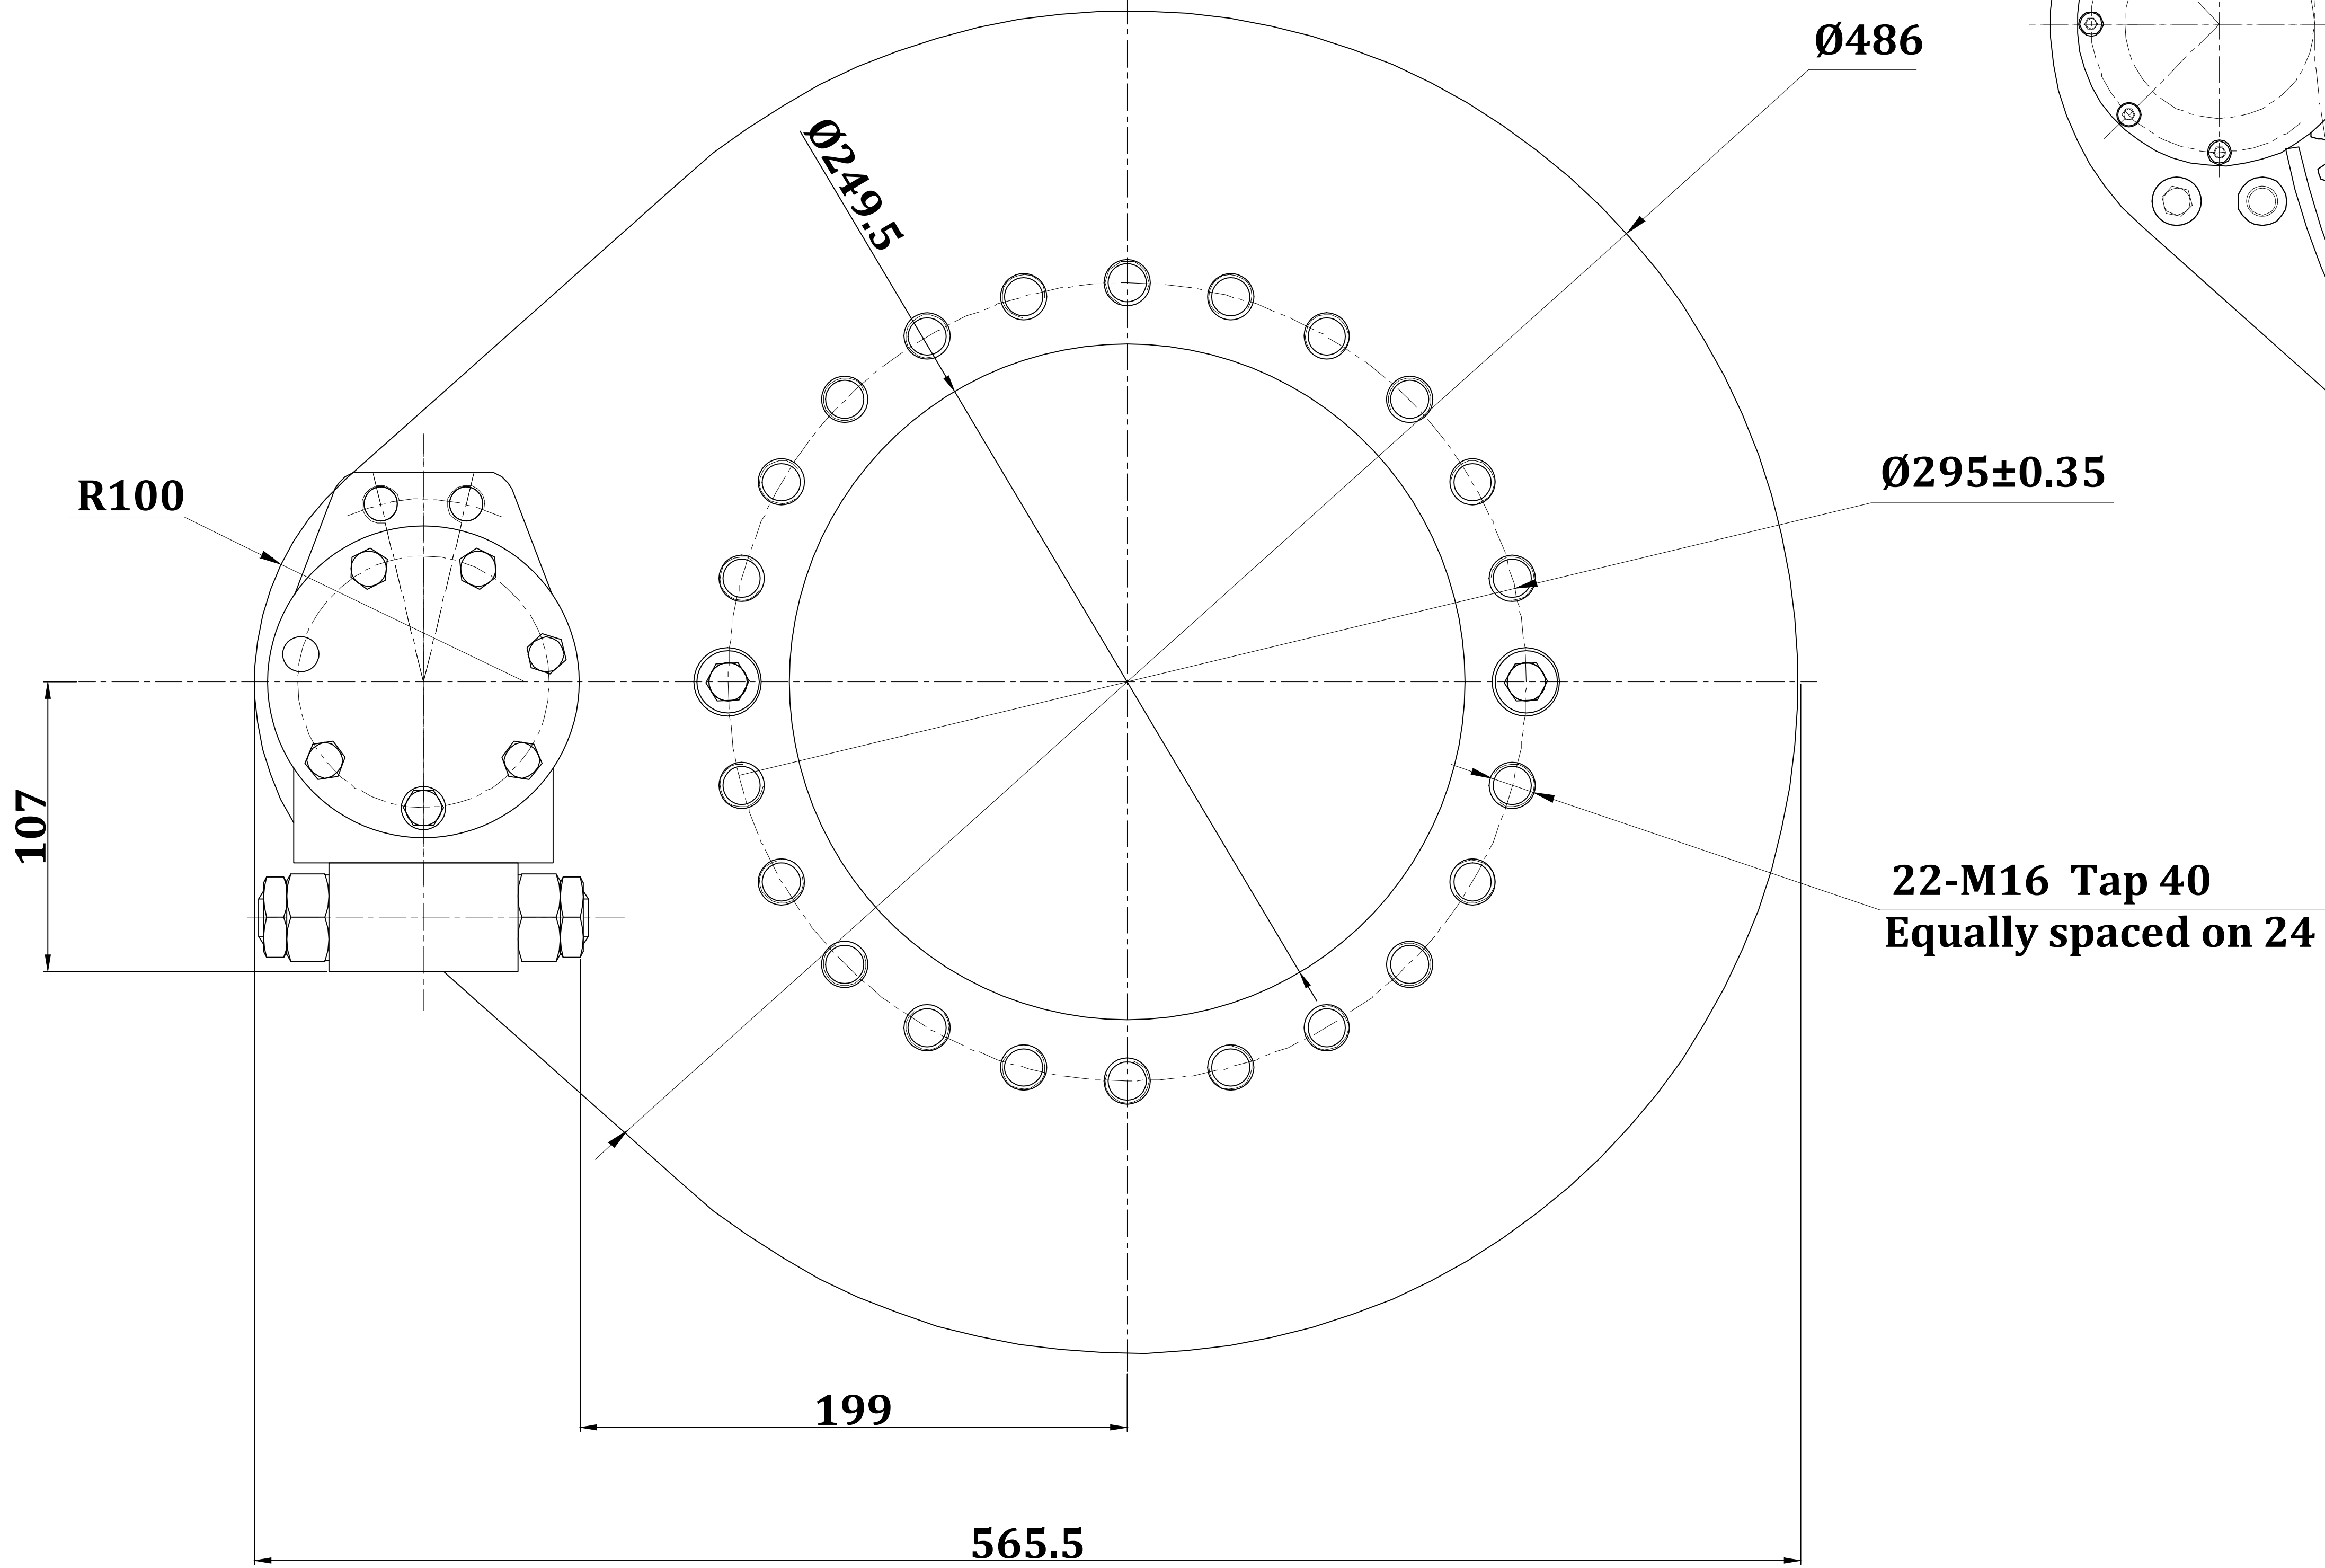

- 1, The pressure adjustable range of safety buffer valve: 10-20MPa
2, Surface hardness of ring gear of slewing ring gear treated by medium frequency HRC50
3, Rotation speed of slewing ring 8-20r/min

Slewing Drive Performance Parameters		
Tilting Moment	67.8 kN.m	50x10 ³ lbf.ft
Holding Torque	48 kN.m	35x10 ³ lbf.ft
Static Axial Load Rating	555 kN	125x10 ³ lbf
Static Radial Load Rating	222 kN	50x10 ³ lbf
Gear Ratio	6.43:1	
Precision	≤0.17°	

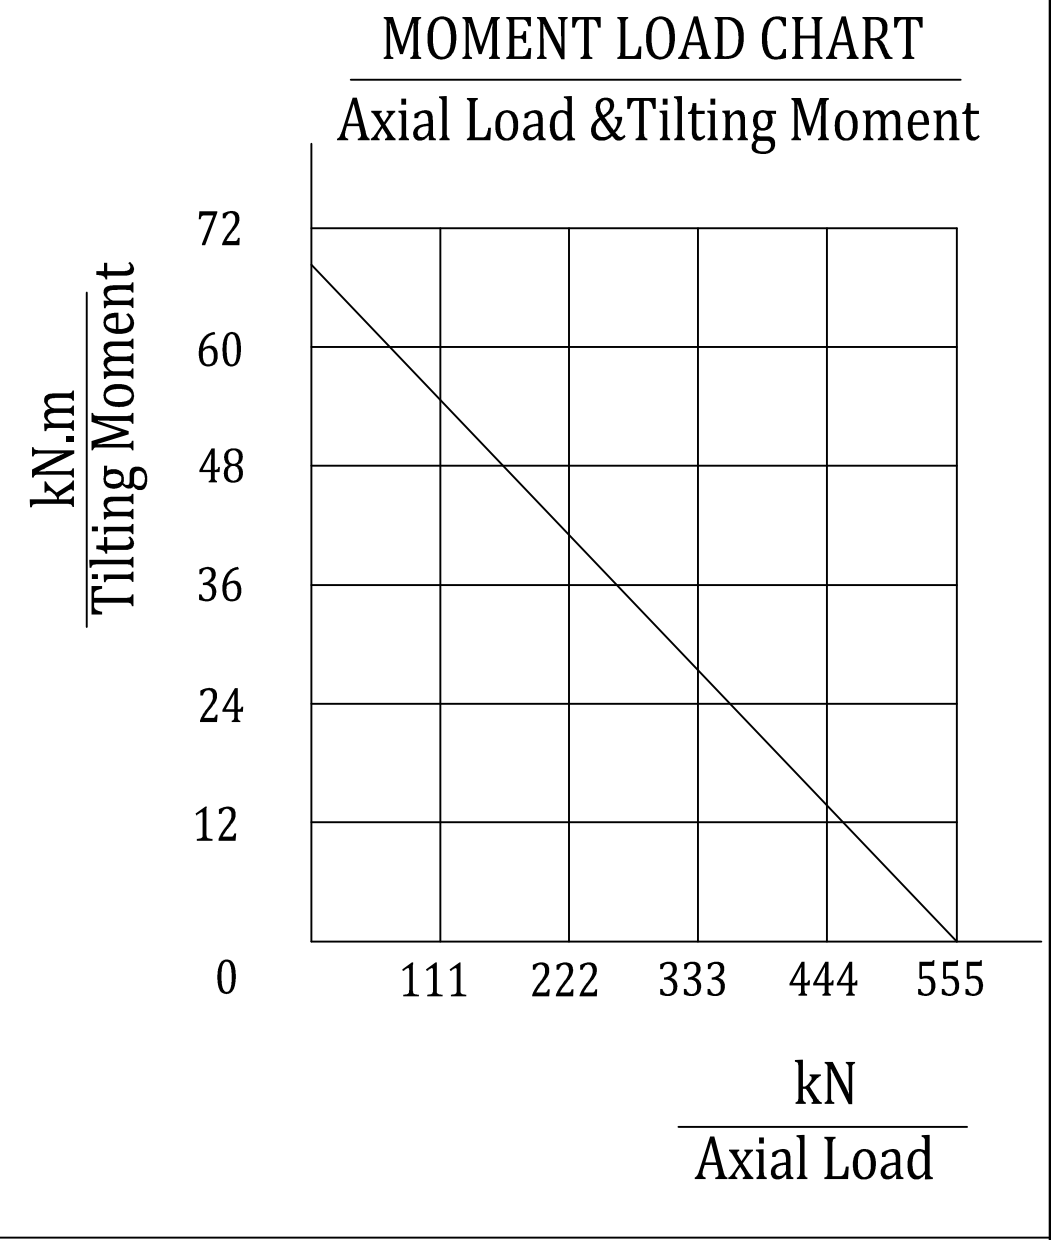

REV	DATE	REVISER	REVISER			
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2019/8/1	Rui Wang				
APPROVED BY	2019/8/1	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
				1:3		
			SIZE	A3	SP14-SG-BRHM	
SYMBOL ISO			SHEET	1/1		
					REV	A